



PC MOUNTING

SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	1	2	3
OFF	1	4	3
OPEN	2-1, 5-4		2-3, 5-6





CIRCUIT: DPDT

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. PLATING MATERIAL: SILVER
 5. CONTACT RATING: 5A @120VAC OR 28VDC, 2A @250VAC
 6. CONTACT RESISTANCE: 10m OHM MAX.
 6. ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.

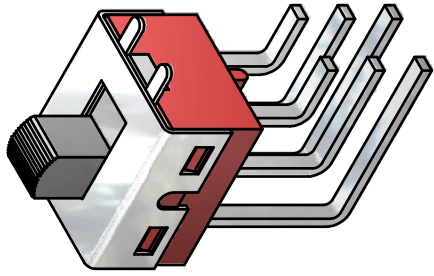

ISOMETRIC

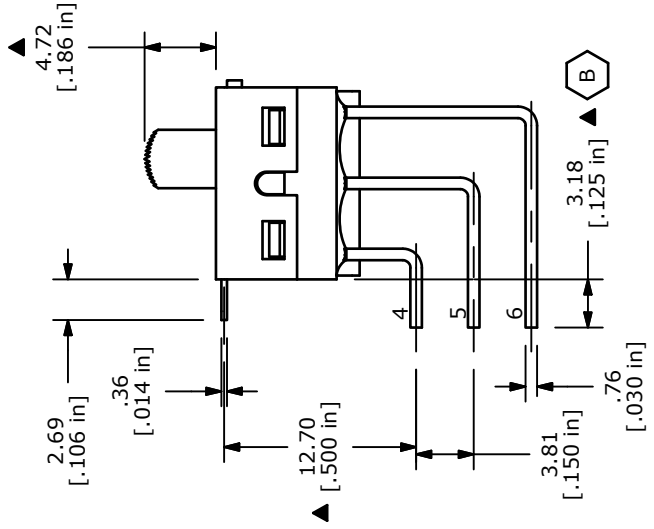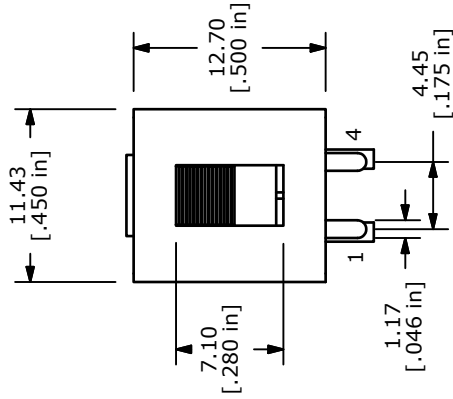

C	19565	DRAWING UPDATE	1/6/11	BGL
B	14850	CORRECTED TERM. LENGTH	4/13/05	JEB
A	14818	RELEASED FOR PRODUCTION	4/7/05	AR
REV	PCR NO	DESCRIPTION	DATE	BY

E-SWITCH®				
TITLE 500SDP3S1M7QEA				
SCALE	2:1	DATE	4/7/2005	DR
				CJB
			DWG	T523002
			REV	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED