
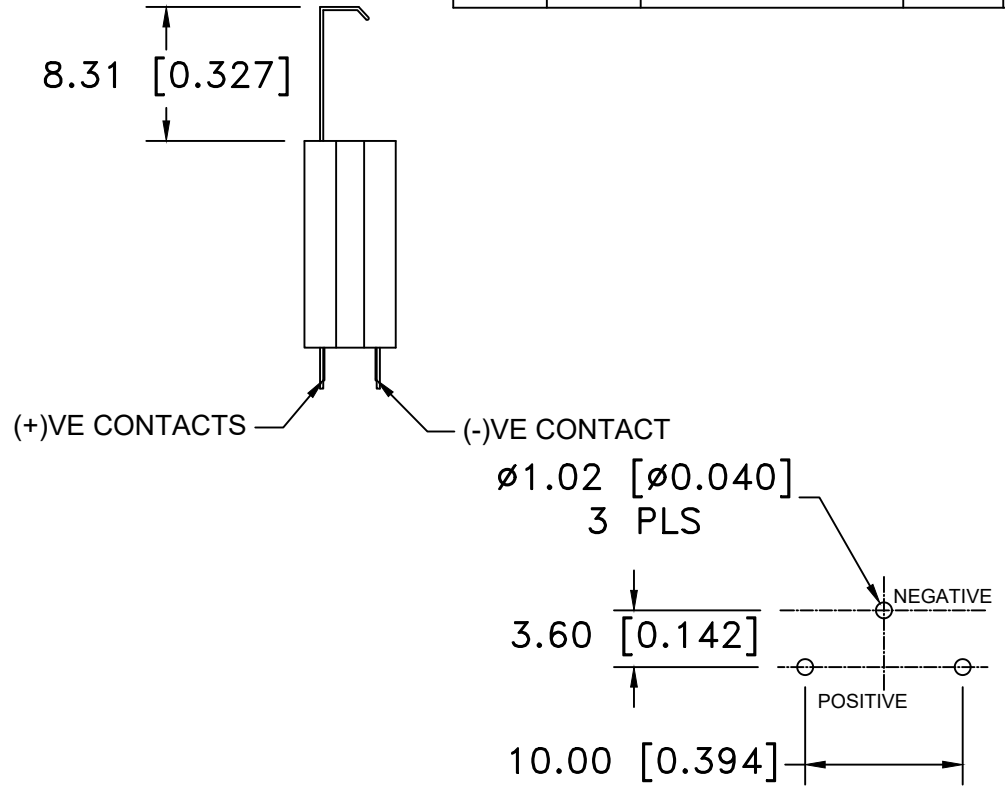
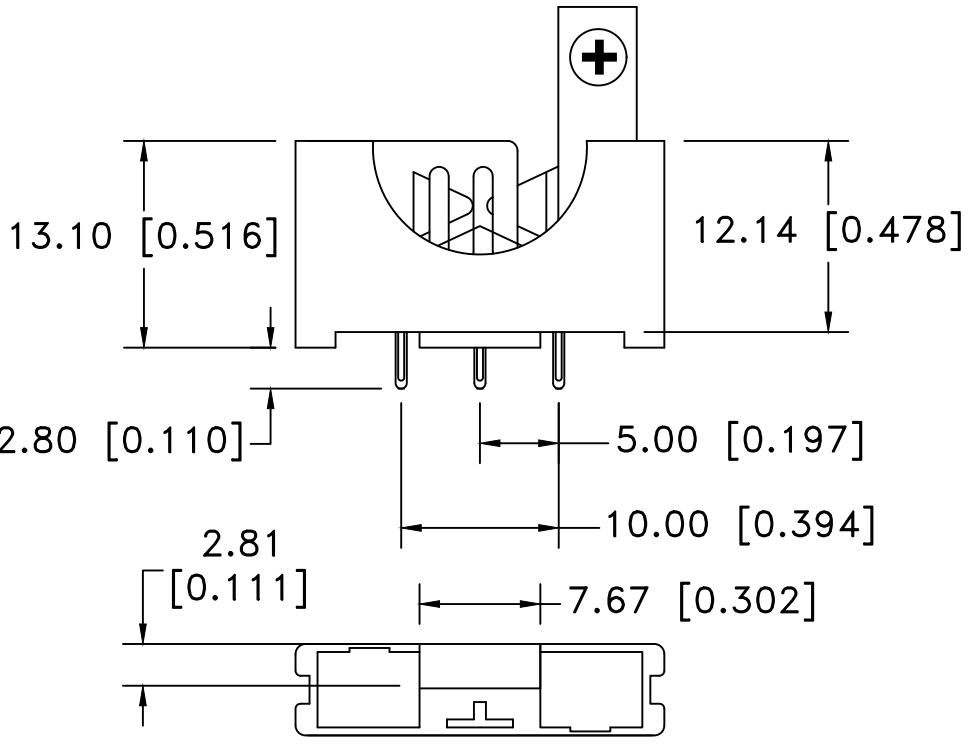



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|------------------------|------|------|-----|
| 10/28/16 | H | ADDED SIDE RIBS | T.B. | B.S. | |
| 03/24/17 | J | UPDATED UL FILE NUMBER | T.B. | B.S. | |
| 11/22/17 | K | ADDED BOTTOM VIEW | T.B. | B.S. | |
| | | | | | |
| | | | | | |

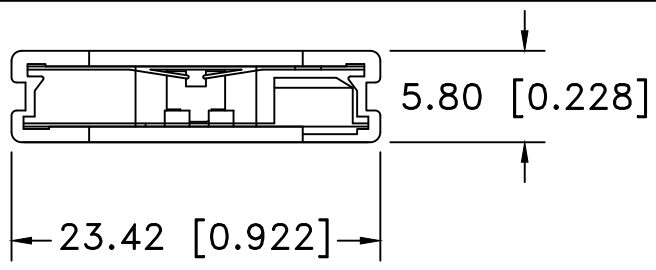

PCB LAYOUT

NOTES:
MATERIAL: GLASS FILLED NYLON 66, UL94V-0
COLOR BLACK, UL FILE NO. E245249
CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
ELECTRICAL :
VOLTAGE: 250V AC
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 1000mΩ AT DC 500V
DIELECTRIC STRENGTH: AC 1000V PER MINUTE
TEMPERATURE RANGE: -40°C TO +200°C
ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|------------------|---------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | | Scale | Drawn By B.S. |
| Fractional ± .8 (.030) | Title | Approved By T.B. | |
| Angular ± 3° | Date | Drawing Number | |
| | 11/22/17 | BK-5058 | |